




# KAORI Folded Fin

## 高力折曲型熱交換鰭片



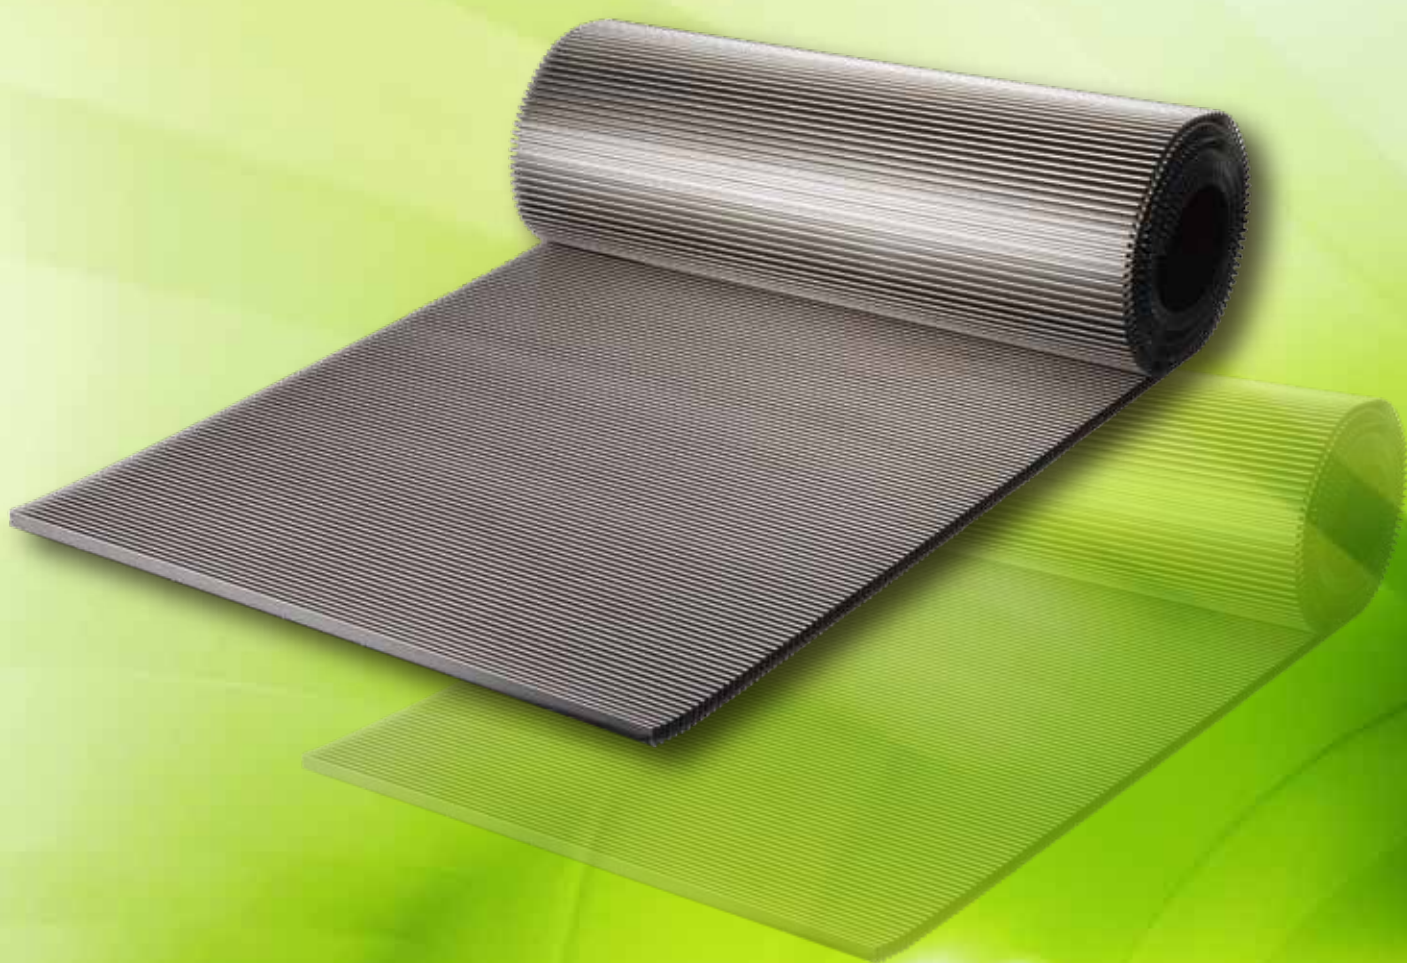


Efficiency  
Environment  
Performance

<http://www.kaori.com.tw>

# Specification

<http://www.kaori.com.tw>

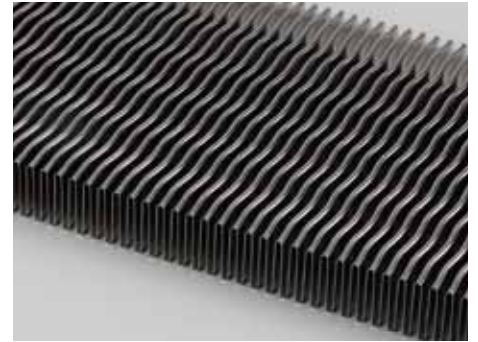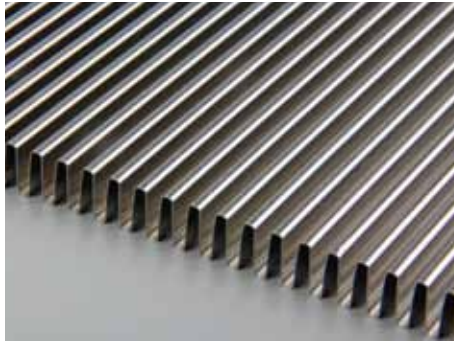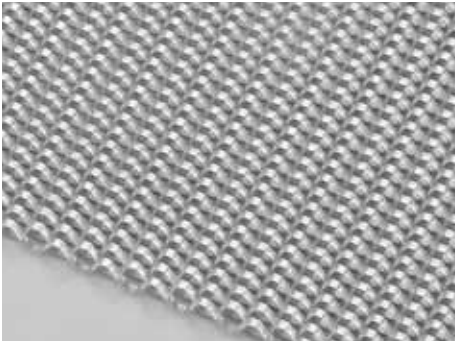

|                               | Mesh Folded Fin                                                  | Straight Folded Fin | Wavy Folded Fin |
|-------------------------------|------------------------------------------------------------------|---------------------|-----------------|
| Material thickness            | 0.05 ~ 0.5 mm                                                    | 0.05 ~ 1.0 mm       | 0.05 to 0.5 mm  |
| Fins per Inch                 | 4 FPI ~ 40 FPI                                                   | 2 FPI ~ 50 FPI      | 2 FPI to 50 FPI |
| Fin Height                    | 1.0 ~ 20 mm                                                      | 0.5 ~ 25 mm         | 2.0 to 25 mm    |
| Flow Length<br>(Slit Width)   | 10 ~ 600 mm                                                      | 3~ 600 mm           | 5 to 600 mm     |
| Cutoff Length<br>(Flow Width) | Any specify length                                               |                     |                 |
| Material                      | Aluminum, Copper, SST, Inconel Super Alloy and any other request |                     |                 |

KAORI



高力熱處理工業股份有限公司

KAORI HEAT TREATMENT CO., LTD.

TEL : +886-3-4527005 FAX : +886-3-4612283

32062中壢工業區吉林北路5-2號

創新、品質、責任、榮譽  
Innovation、Quality、Responsibility、Honor